



Contec AG | Glütschbachstrasse 90 | CH-3661 Uetendorf | contec.ch | info@contec.ch | +41 33 346 06 00



 Contec.greenlight

Contec.greenlight – Photovoltaics and green roofing combined. Combine the benefits of green roofing and a PV system with the ingenious mounting system to create the unique EnergyGreenRoof.

Advantages


- No roof penetration; load-bearing capacity provided by the green roof
- Quick and easy installation
- Optimal use of roof space
- No loss of yield due to shading of plants
- Module height (lower edge) at least 30 cm above the substrate
- Snow slides off quickly
- No accumulation of heat

Facts

Plate dimensions	1980x980x60 mm
Weight per unit	12 kg
Water storage volume	39.5 litres (empty)
Module inclination	10°, 15° or 20° standard (optional 5 - 35°)
Material	HDPE, Magnelis, aluminium and stainless steel

Application / Service

Contec.greenlight is suitable for green flat roofs. We calculate and draw up all the necessary details, including wind suction, ballasting, panel spacing and the installation plan.

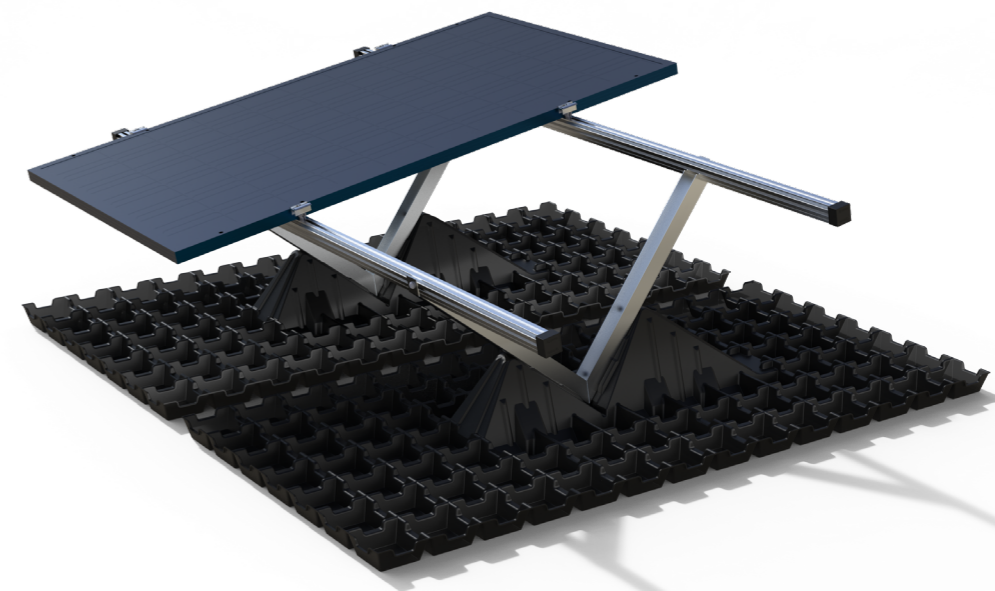

Contec.greenlight